



4-Channel Passive UTP to BNC Balun



Installation Schematic

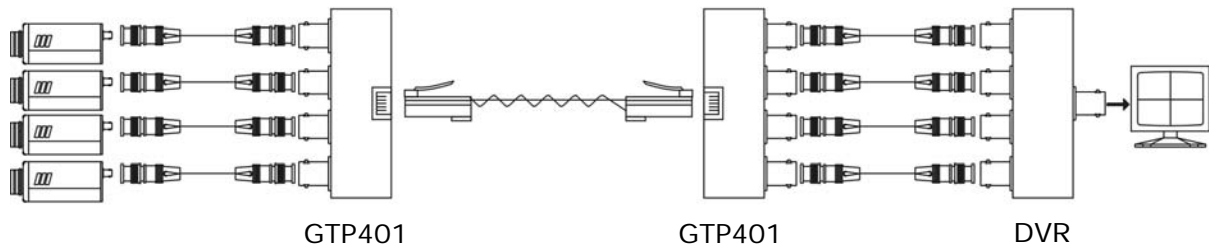

RJ45 Pin Assignments



| Pin | Color |
|-----|-------|
| 1 | W-O |
| 2 | O |
| 3 | W-G |
| 4 | BL |
| 5 | W-BL |
| 6 | G |
| 7 | W-BR |
| 8 | BR |

Features

- ✓ Impedance matching 75Ω coaxial to 100Ω twisted pair
- ✓ Transmits/receives up to 4 x composite video signals
- ✓ Extra interference rejection circuitry built-in
- ✓ Transmission range – 300m in colour, 600m in monochrome
- ✓ Dimension - 110mm(l) x 77mm(h) x 24mm(w)
- ✓ 4 x BNC male to RJ45 female connector
- ✓ For use with Category 5, 5e & 6 UTP (unshielded twisted pair) cable. Wire gauge 24awg
- ✓ Uses one twisted pair for each composite video signal
- ✓ No external power required